

Major Specifications of ApeosPort-IV C5570 / C4470 / C3370 / C2270

Basic Function/Copy Function				
	ApeosPort-IV C5570	ApeosPort-IV C4470	ApeosPort-IV C3370	ApeosPort-IV C2270
Type	Console Type			
Memory Capacity*1	1.5GB (Max.2GB)			
Hard Disk Capacity*2	40GB			
Color Capability	Full Color			
Scanning Resolution	600x600dpi			
Printing Resolution	1,200x2,400dpi (multivalued photo), 600x600dpi (character/character and photo/photo/map)			
Halftone/Printable Colors	256 levels for each color (16.7 million colors)			
Warm-up Time	28 seconds or less (at room temperature of 20°C) 24 seconds or less when the main power is on			
Original Paper Size	Maximum for sheet and book: 297x432 mm (A3, 11x17")			
Output Paper Size	Max.	SRA3, 12.6x17.7" (320x449.6mm), 12x18" (304.8x457.2mm) [For By-pass Tray: 12x19" (304.8x482.6mm)]		
	Min.	A5 [For By-pass Tray: Postcards (made by Japan Post Service Co., Ltd.), envelope (120x235mm)]		
Output Paper Weight*3	Image Loss	Lead edge 4mm or less, Trail edge 2mm or less, Right & Left Edges 2mm or less		
	Trays	60-256g/m ²		
First Copy Output Time (A4LEF, Monochrome priority mode)	Monochrome:	Monochrome:	Monochrome:	Monochrome:
	3.7 seconds	4.4 seconds	4.9 seconds	6.6 seconds
Magnification	Full Color:	Full Color:	Full Color:	Full Color:
	5.2 seconds	5.7 seconds	6.4 seconds	8.7 seconds
Continuous Copy Speed*4	100%	1: 1x0.7%		
	Preset	1:0.250, 1:0.500, 1:0.612, 1:0.707, 1:0.816, 1:0.866, 1:1.154, 1:1.225		
Feed Tray/Capacity*5	Variable	1: 0.25-1:4.00 (by 1% increments)		
	A4LEF/BSLEF	Monochrome: 55cpm Color: 50cpm	Monochrome: 45cpm Color: 45cpm	Monochrome: 35cpm Color: 35cpm
Continuous Copy Speed*4	A4/B5	Monochrome: 39cpm Color: 36cpm	Monochrome: 32cpm Color: 32cpm	Monochrome: 27cpm Color: 27cpm
	B4	Monochrome: 32cpm Color: 29cpm	Monochrome: 26cpm Color: 26cpm	Monochrome: 23cpm Color: 23cpm
Interface	A3	Monochrome: 27cpm Color: 25cpm	Monochrome: 22cpm Color: 22cpm	Monochrome: 20cpm Color: 20cpm
	Standard	560 sheets x 4 trays + 100 sheets (By-pass Tray)		
Power Supply	Optional	High-capacity feed tray (one tray): 2,300 sheets		
	Maximum Paper Capacity	4,640 sheets [standard+High-capacity feed tray (one tray)]		
Power Consumption	Continuous Copy*6	999 sheets		
	Output Tray Capacity*5, *7	400 sheets (A4LEF), 200 sheets (A3)		
Dimensions	Power Supply	100V AC±10%, 15A, 50/60Hz		
	Power Consumption	1.5kW or less, Sleep Mode: 1.5W or less*8, Standby Mode: 130W or less		
Space Requirement	Dimensions	(W)640x(D)685x(H)1,128mm (with ADF)		
	Weight*9	133kg (with ADF)		
Fax Function	Space Requirement	(W)1,064 x (D)685mm (when by-pass tray is extended and the stopper for ADF is open)		

*1: Additional memory might be required depending on the functions used. To upgrade memory to 2 GB, the 512 MB memory must be replaced with 1 GB additionally purchased. *2: Not all of the indicated hard disk capacity may be available. *3: Use of Fuji Xerox brand paper is recommended. Document may not be printed correctly depending on usage conditions. *4: The speed may be lower due to image quality adjustment. *5: Fuji Xerox "P" paper. *6: In order to stabilize the image quality, machine may stop its operation temporarily. *7: When the optional inner catch tray is installed, the capacity of the center tray is 250 sheets (A4LEF), and that of the inner catch tray is 250 sheets (A4LEF). *8: Except for G4 supporting and external/extension line models. *9: Except for toner.

Fax Function		Item	Description
Sent Document Size		Max.: A3, 11x17", Long size document (Max. 600mm)	
		Max.: A3, 11x17", Min.: A5	
Recording Paper Size		Max.: A3, 11x17", Min.: A5	
		Max.: A3, 11x17", Min.: A5	
Transmission Time		Less than 2 seconds*1	
		Less than 2 seconds*1	
Transmission Mode		G3	
		G3	
Resolution		Standard	8x3.85 lines/mm, 200x100dpi (7.9x3.9 dots/mm)
		Fine	8x7.7 lines/mm, 200x200dpi (7.9x7.9 dots/mm)
Coding Method		Super Fine (400dpi)	16x15.4 lines/mm, 400x400dpi (15.7x15.7 dots/mm)
		Super Fine (600dpi)	600x600dpi (23.6x23.6 dots/mm)
Transmission Speed		MH, MR, MMR, JBIG	
		G3: 33.6/31.2/28.8/26.4/24.0/21.6/19.2/16.8/14.4/12.0/9.6/7.2/4.8/2.4kbps	
Applicable Lines		Telephone subscriber line, PBX, facsimile communication network (PSTN), Max. 3 ports*2	
		Telephone subscriber line, PBX, facsimile communication network (PSTN), Max. 3 ports*2	

*1: When A4 size document with approximately 700 characters is transmitted in standard image-quality (8x3.85 lines/mm) and in high speed mode (28.8kbps or faster, 8IG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition. *2: Up to three lines can be connected. Number of ports is that of the channels that can be used for communication.

Internet Fax Function		Item	Description
Sent Document Size		A3, B4, A4	
		A3, B4, A4	
Transmission Resolution		Same as those in Fax Function	
		Same as those in Fax Function	
Output Format		Format: TIFF-FX, Compression method: MH, MMR, JBIG	
		Format: TIFF-FX, Compression method: MH, MMR, JBIG	
Profile		TIFF-S, TIFF-F, TIFF-J	
		TIFF-S, TIFF-F, TIFF-J	
Protocol		To send: SMTP. To receive: SMTP, POP3	
		To send: SMTP. To receive: SMTP, POP3	
Interface		Standard	Ethernet 100BASE-TX/10BASE-T
		Optional	Ethernet 1000BASE-T

Duplex Automatic Document Feeder				
	ApeosPort-IV C5570	ApeosPort-IV C4470	ApeosPort-IV C3370	ApeosPort-IV C2270
Type	Duplex Automatic Document Feeder			
Original Paper Size/Paper Weight	Max.: A3, 11x17", Min.: A5, 38-128g/m ² (Duplex: 50-128g/m ²)			
Feeding Capacity*1	110 sheets			
Feeding Speed*2	Monochrome:	Monochrome:	Monochrome:	Monochrome:
	55cpm	45cpm	35cpm	25cpm
Dimensions/Weight	Color:	Color:	Color:	Color:
	50cpm	45cpm	35cpm	25cpm
Dimensions/Weight	(W)560x(D)498x(H)125mm, 8kg			
	(W)560x(D)498x(H)125mm, 8kg			

*1: Fuji Xerox "P" paper. *2: A4LEF/Simplex

<Reproduction Prohibitions> Please note that reproduction of the following is prohibited by law:

- Domestic and overseas bank notes and coins, government-issued securities, national bonds and local bond certificates.
- Unused postage stamps and post cards.
- Certificate stamps stipulated by law.
- The reproduction of copyrighted works (literary works, musical works, paintings, engravings, maps, cinematographic works, photographic works, etc.) is prohibited except when they are reproduced personally, at home or within limited range.
- This product has an anti-counterfeit feature. This feature does not assure complete prevention of illegal reproduction. Please be careful about the management of equipment used.

Print Function		Item	Description
Type		Built-in Type	
		Built-in Type	
Continuous Print Speed*1		Same as those shown in Basic Function/Copy Function	
		Same as those shown in Basic Function/Copy Function	
Resolution		Output	1,200x2,400dpi, 1,200x1,200dpi
		Data Processing	Standard: 600x600dpi, High quality: 600x600dpi, High resolution: 1,200x1,200dpi
PDL		Standard	ART EX
		Optional	Adobe® PostScript® 3™
Protocol		Ethernet (Standard)	TCP/IP (Ipd, IPP, Port9100, SMB, WSD*2, Novell® NetWare®, BMLinkS®, ThinPrint)
		Novell® NetWare® (IPX/SPX), NetBEUI (SMB), EtherTalk*3	
OS*4		Parallel (Optional)	Compatible, Nibble, ECP
		Standard	[ART EX Driver] Windows® 2000 Japanese/English, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® XP Professional x64 Edition Japanese/English, Windows Server® 2003 x64 Editions Japanese/English, Windows Vista® 64-bit Japanese/English, Windows Server® 2008 (x64) Japanese/English, Mac OS X 10.5 Japanese/English [Mac OS X Driver]Mac OS X 10.5 Japanese/English
Optional		[Adobe® PostScript® 3™ Kit] Windows® 2000 Japanese/English, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® XP Professional x64 Edition Japanese/English, Windows Server® 2003 x64 Editions Japanese/English, Windows Vista® 64-bit Japanese/English, Windows Server® 2008 (x64) Japanese/English, Mac OS X 10.5 Japanese/English [Mac OS X Driver]Mac OS X 10.5 Japanese/English	
Fonts		Standard	Outline (Heisei-Minchou™ W3, Heisei-Kaku-Gothic™ W5, European 19 Fonts), Stroke (Japanese Fonts, European Fonts: for HP-GL)
		Optional	[Adobe® PostScript® 3™ Kit] Heisei 2 Fonts: Japanese 2 Fonts (Heisei-Minchou™ W3, Heisei-Kaku-Gothic™ W5), European 136 Fonts Morisawa 2 Fonts: Japanese 2 Fonts (Ryumin-L-KI™, Middle Gothic 888™), European 136 Fonts [Emulation Kit] European 82 Fonts, Symbol 37 Sets
Emulation		Standard	ART IV, ESC/P (VP-1000), BMLinks®, PDF, XPS, DocuWorks, TIFF, JPEG
		Optional	[Emulation Kit] PC-PR201H, HP-GL (HP7586B), HP-GL2/RTL (HP Design Jet750C Plus), PCL5/PCL6
Interface		Standard	Ethernet 100BASE-TX/10BASE-T, USB2.0*5
		Optional	Ethernet 1000BASE-T*, Bi-directional parallel (IEEE1284-B)

*1: Printing speed may be lower depending on documents when printed in high resolution. *2: WSD: Web Services on Devices. *3: The optional Adobe® PostScript® 3™ kit is required. Supports Mac OS 8.6/9.2.2 Japanese, Mac OS X 10.3.9/10.4.10 Japanese. *4: Please refer to the Fuji Xerox web site about the latest compliant OS information. *5: Windows® 2000 Japanese/English Service Pack 3 or later version must be applied. *6: Supports Windows® 2000, Windows® XP, Windows Server® 2003, Windows Vista®, Windows Server® 2008 (x86), Windows® XP Professional x64 Edition, Windows Server® 2003 x64 Editions, Windows Vista® 64-bit, Windows Server® 2008 (x64), Mac OS 8.6/9.2.2 Japanese, Mac OS X 10.3.9/10.4.10/10.5 Japanese. * To print in a Linux® OS environment, please use the Japanese Linux® printer driver which can be downloaded from the Fuji Xerox web site as non-guaranteed software.

Scan Function		Item	Description
Type		Color Scanner	
		Color Scanner	
Original Paper Size		Same as those shown in Basic Function/Copy Function	
		Same as those shown in Basic Function/Copy Function	
Scanning Resolution		600x600dpi, 400x400dpi, 300x300dpi, 200x200dpi	
		600x600dpi, 400x400dpi, 300x300dpi, 200x200dpi	
Scanning Halftone		10-bit input and 8-bit output for each RGB	
		10-bit input and 8-bit output for each RGB	
Scanning Speed*1		Monochrome: 70ipm, Color: 70ipm	
		Monochrome: 70ipm, Color: 70ipm	
Interface		Standard	Ethernet 100BASE-TX/10BASE-T
		Optional	Ethernet 1000BASE-T
Scan to Mailbox		Protocol	TCP/IP (WebDAV, HTTP)
		Output Format	Monochrome Binary: TIFF, DocuWorks®, PDF*2, XPS*2 Grayscale: TIFF, JPEG*3, DocuWorks®, PDF*2, XPS*2 Full Color: TIFF, JPEG, DocuWorks®, PDF*2, XPS*2 High-compression DocuWorks*2*4, High-compression PDF*2*4, High-compression XPS*2*4
Save to PC		Driver	TWAIN
		OS*4	Windows® 2000 Japanese/English, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® XP Professional x64 Edition Japanese/English, Windows Server® 2003 x64 Editions Japanese/English, Windows Vista® 64-bit Japanese/English, Windows Server® 2008 (x64) Japanese/English
Save to PC		Protocol	TCP/IP (SMB, FTP)
		OS*5	Windows® 2000 Japanese/English, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows® XP Professional x64 Edition Japanese, Windows Server® 2003 x64 Editions Japanese, Windows Vista® 64-bit Japanese, Windows Server® 2008 (x86) Japanese/English, Mac OS X 10.2.x/10.3.8/10.3.9/10.4.2/10.4.4/10.4.8/10.4.9/10.4.10/10.5.0/10.5.1/10.5.2/10.5.3/10.5.4 Japanese/English, NetWare 5.11/5.12) Japanese*6
e-Mail		Output Format	Monochrome Binary: TIFF, DocuWorks, PDF, XPS Grayscale/Full Color: TIFF, JPEG, DocuWorks, PDF, XPS, High-compression DocuWorks*4, High-compression PDF*4, High-compression XPS*4
		Protocol	TCP/IP (SMTP)
e-Mail		Output Format	Monochrome Binary: TIFF, DocuWorks, PDF, XPS Grayscale/Full Color: TIFF, JPEG, DocuWorks, PDF, XPS, High-compression DocuWorks*4, High-compression PDF*4, High-compression XPS*4
		Output Format	Monochrome Binary: TIFF, DocuWorks, PDF, XPS Grayscale/Full Color: TIFF, JPEG, DocuWorks, PDF, XPS, High-compression DocuWorks*4, High-compression PDF*4, High-compression XPS*4

*1: Scanning speed varies according to the document type. *2: When scanned image is retrieved using CentreWare Internet Services. *3: When Network Scanner Utility 3 is used. *4: When the optional Image Compression Kit and Extension Power Supply Kit are installed. *5: Please refer to the Fuji Xerox web site about the latest compliant OS information. *6: Supports only FTP.

* If the storage media (hard disk) of the product fails, the data received, stored, or registered in the media may be erased. Fuji Xerox will not be held responsible for any damage caused due to such loss of data.
* Key repair components will be available for at least 7 years after the product is no longer manufactured.



<For Your Safe Use>

- Before using the product, read the Instruction Manual carefully for proper use.
- Use the product with an appropriate and adequate power source and voltage displayed.
- Be sure to ground the machine. In the case of a failure or short circuit, an electric shock may result.



For comments about Fuji Xerox and consultation, contact **the Customer Information Center.**

0120-27-4100

Toll-free call service time: 9:00 to 12:00 and 13:00 to 17:00 excluding Saturdays, Sundays and national holidays (at Headquarters in Tokyo). However, you cannot use this service with an extension telephone with call area restrictions. Please use a nation-wide call available telephone.

The telephone call might be recorded to correctly understand your inquiry or to later check how the receiver provided support.

ApeosPort-IV

C5570 / C4470 / C3370 / C2270



ApeosPort-IV C5570 / C4470 / C3370 / C2270

Digital Color Multifunction Device



ApeosPort Value

(Added Value of ApeosPort-IV C5570/C4470/C3370/C2270)

High Compatibility with Internet IT Systems

Apeos iiX linkage


ApeosPort, which adopts the Apeos iiX as its framework, can be linked with existing information sharing software^{*1}. For example, by linking with DocuShare, a software for sharing documents registered in a web database, ApeosPort allows users to browse, search, and direct print commands for shared documents on the ArcWizShare server directly from the control panel.

^{*1}: Optional. External Access Kit is required.

^{*2}: Separately sold software. DocuShare External Access for Apeos is required for linking with ApeosPort.

※ For the software that can be linked to ApeosPort, go to: <http://www.fujixerox.co.jp/apesos/solution.html>

Apeos iiX linkage

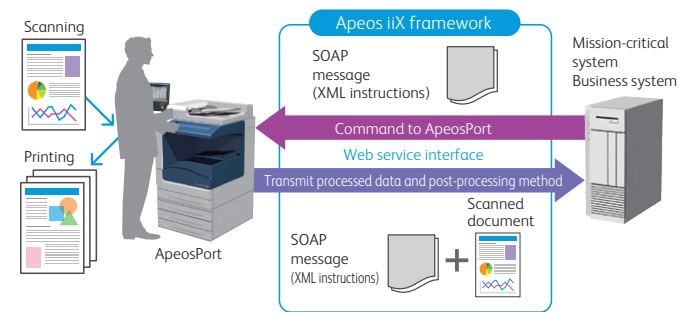

External authentication

The user information of the directory service can be used for user authentication when using ApeosPort. Moreover, ApeosWare Authentication Agent software allows administrators to set usage restrictions on copying, printing, faxing, and scanning as well as color mode. Users not registered to the authentication server can also be set up to use ApeosPort.

IC card linkage

IC Card Gate 2, a separately sold output management & authentication system, achieves even smoother authentication by requiring users just to hold an IC card over the unit.




Multi-model on-demand printing

After sending a print command from a PC, you can select an available ApeosPort to output the documents. The separately sold DocuHouse On-Demand Print software offers two advantages. One is that the data sent from a client PC can be spooled on the server, and then printed out by newly issuing a print command from a compatible multifunction device or printer, which reduces the risk of unattended output documents being seen or taken away by a third party. The other is that the accumulated commands can be checked and unnecessary output commands can be deleted, which minimizes unnecessary printing.

^{*} Optional. External Access Kit is required.

^{*} Support planned for autumn 2009

ApeosPort-DocuHouse on-demand printing

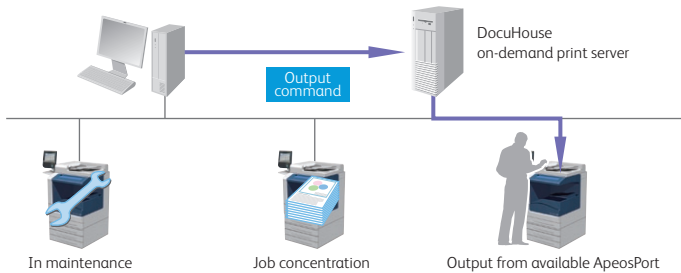

The appearance and control panel have also been redesigned. Every aspect of the product is now easier to use.

One point of contact

User operation has been consolidated to the blue-colored center of the product. The white used for the rest of the product harmonizes with the surroundings, while the use of high-contrast blue makes it possible for users to easily find and access the multifunction device and necessary functions in an office.

ApeosPort-IV C5570	Monochrome		Color	TEC [*] 3.05 kWh
	Copy/Print	Scan		
	55ppm	70ipm	50ppm	

ApeosPort-IV C4470	Monochrome		Color	TEC [*] 2.44 kWh
	Copy/Print	Scan		
	45ppm	70ipm	50ppm	

ApeosPort-IV C3370	Monochrome		Color	TEC [*] 1.68 kWh
	Copy/Print	Scan		
	35ppm	70ipm	50ppm	

ApeosPort-IV C2270	Monochrome		Color	TEC [*] 1.15 kWh
	Copy/Print	Scan		
	25ppm	70ipm	50ppm	


^{*}TEC Value: Estimated amount of standard power consumption in one week.

Easier Digitization of Paper Documents

Multi-send function

On ApeosPort, you can use a function called "Job Flow" to register various stylized series of actions such as digitization of paper documents and distribution of the electronic documents. By using various Job Flow registrations set according to your network environment and work flows, ApeosPort helps maximize your work efficiency. For example, with one-time scanning, ApeosPort achieves dynamic and smooth document distribution such as saving to multiple PCs and servers, and sending as an e-mail attachment, Internet fax, or regular fax. Moreover, a common Job Flow setting can be used on multiple ApeosPort devices by using the separately sold ApeosWare JF Pool Service software.


Multi-send function

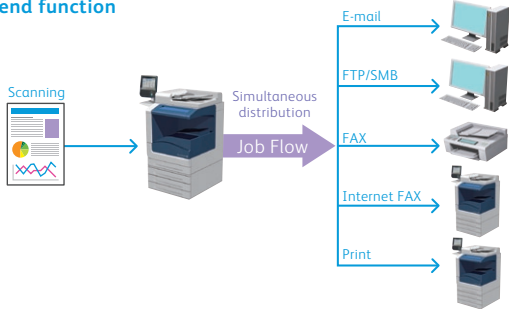

Paper-free Fax + Job Flow

Digitization of faxed documents (Paper-free Fax) can also be registered as a Job Flow. By setting a Job Flow to send the received fax from the mailbox of ApeosPort, digitization and distribution of the received fax documents can be achieved with ApeosPort alone. This allows, for example, automatic processing of operations such as conversion to DocuWorks documents or PDFs and transfer to a PC simultaneously with reception.

ApeosPort paperless fax reception

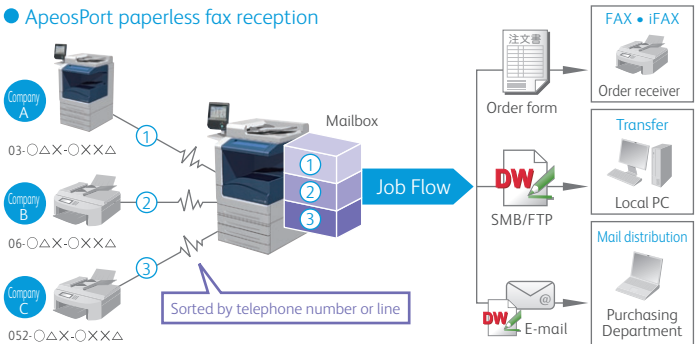

Dependable Document Security


Signed and encrypted communication via e-mail and Internet fax

ApeosPort allows more secure utilization of e-mails and Internet faxes. Using the Device Certificate for Apeos issued by the Fuji Xerox Product Authentication Office, the PKI^{*1} function of ApeosPort is enabled, allowing document encryption with S/MIME^{*2} and digital signatures. Illegal eavesdropping and falsification by third parties, as well as spoofing of senders can be prevented.

^{*1} Public Key Infrastructure

^{*2} Secure / Multipurpose Internet Mail Extensions

Device Certification for Apeos

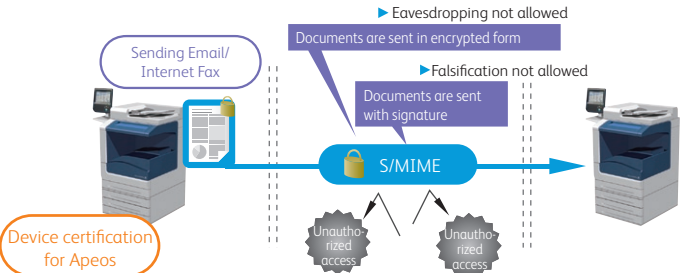

Scanned document with signature

When scanning paper documents, you can not only save the documents as DocuWorks documents and PDFs, but also set the signature. This feature reduces the risk of falsification of electronic documents.


Image log

ApeosPort allows the management of document information beyond who*, when, and type of task, by storing the images of copied, printed, faxed, and scanned documents. By using the separately sold Image Logging System software, the image data of each document is created, accumulated, and saved. If a confidential document is leaked, the exact document can be quickly investigated based on the document image.

Note: Optional. Image Log Kit, Image Extension Kit, are required.

^{*} The main unit must be set to the authentication mode.

Document image log recording

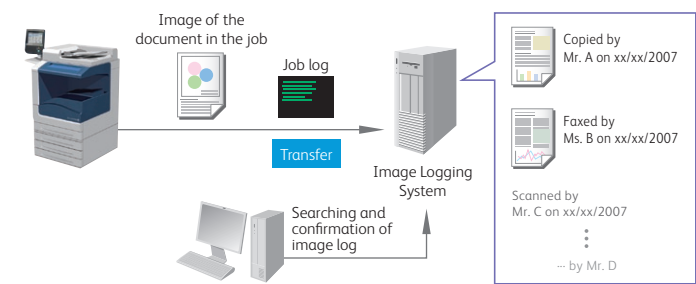

UUID* printing

A job log identifier called UUID can be printed on output documents. By inserting ID information directly on the paper, document information such as the person and place of copy, print, fax or scan can be traced in case of information leakage.

^{*}Universally Unique Identifier

Efficient data compression

Simultaneous scanning and data compression^{*1}

Reduced transmission load through high compression

Data can be compressed while scanning color documents in order to create DocuWorks documents^{*2}, PDF documents^{*3}, and XPS documents that take up small capacity. By reducing the transmission load, more documents can be shared.


^{*1}: Optional. The image compression kit is required.

^{*2}: These documents can be opened in DocuWorks Viewer Light 5.1 or later version.

^{*3}: The PDF version is 1.3. These PDF documents can be opened in Acrobat[®] 4.x.

Specific color documents equivalent to black & white documents

Scanned originals that contain relatively few colors, such as documents and drawings that contain red notes, watermarks, and other marks, can be reduced in size even more than through high compression. This makes it easy to attach the scans to e-mail, which makes correspondence with other offices more efficient.

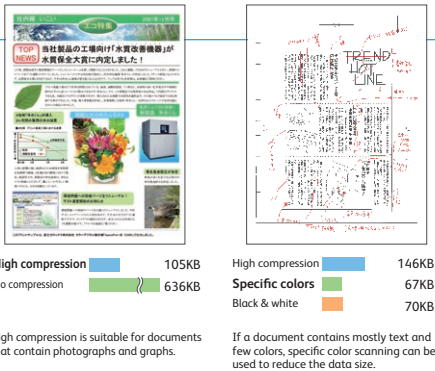

High compression is suitable for documents that contain photographs and graphs.

If a document contains mostly text and few colors, specific color scanning can be used to reduce the data size.