

Major Specifications of DocuCentre-IV C2260

Basic Function/Copy Function		
Item		Description
Type	Console Type	
Memory Capacity*1	1GB (Max.2GB)	
Hard Disk Capacity*2	80GB (Area of use: 40GB)	
Color Capability	Full Color	
Scanning Resolution	600 x 600dpi	
Printing Resolution	600 x 600dpi (2,400dpi corresponding x 600dpi)	
Half-tone/Printable Colors	256 levels for each color (16.7 million colors)	
Warm-up Time*3	35 seconds or less (at room temperature of 20°C) 27 seconds or less when the main power is on	
Original Paper Size	Maximum for sheet and book: 297 x 432 mm (A3, 11 x 17")	
Output Paper Size	Max.	A3, 11 x 17" [For By-pass Tray: A3, 11 x 17"]
	Min.	A5 [For By-pass Tray: Postcards (made by Japan Post Service Co., Ltd.), envelope (120 x 235mm)]
	Image Loss	Lead edge 4mm or less, Trail edge 2mm or less, Right & Left Edges 2mm or less
Output Paper Weight*4	Trays	60-256g/m ²
	By-pass Tray	60-216g/m ²
First Copy Output Time	Monochrome: 6.5 seconds (A4LEF, Monochrome priority mode) Full Color: 8.1 seconds (A4LEF, Color priority mode)	
Magnification	100%	1: 1±0.7%
	Preset	1:0.500, 1:0.707, 1:0.816, 1:0.866, 1:1.154, 1:1.225, 1:1.414, 1:2.000
	Variable	1: 0.25-1:4.00 (by 1% increments)
	A4LEF/B5LEF	Monochrome: 20cpm Color: 20cpm
	A4/B5	Monochrome: 16cpm Color: 16cpm
Continuous Copy Speed*5	B4	Monochrome: 13cpm Color: 13cpm
	A3	Monochrome: 11cpm Color: 11cpm
Feed Tray/ Capacity*6	Standard	560 sheets x 4 trays + 50 sheets (By-pass Tray)
	Maximum Paper Capacity	2,290 sheets (standard)
Continuous Copy*7	999 sheets	
Output Tray Capacity*6, *8	400 sheets (A4LEF), 200 sheets (A3)	
Power Supply	100V AC±10%, 15A, 50/60Hz	
Power Consumption	1.5kW or less, Sleep Mode: 3W or less, Standby Mode: 130W or less	
Dimensions	Model P: (W)585 x (D)640 x (H)1,046mm Model PF-S: (W)585 x (D)640 x (H)1,132mm (with ADF)	
Weight*9	Model P: 1,091kg Model PF-S: 1,151kg (with Fax, ADF)	
Space Requirement	Model P: (W)919 x (D)640mm Model PF-S: (W)964 x (D)640mm (when by-pass tray is extended)	

*1: To upgrade to 2GB, it is necessary to remove 1GB memory and install 2GB memory. *2: Not all of the indicated hard disk capacity may be available. *3: Warm-up time may take longer due to image quality adjustment. *4: Use of Fuji Xerox brand paper is recommended. Document may not be printed correctly depending on usage conditions. *5: The speed may be lower due to image quality adjustment. *6: Fuji Xerox "P" paper. *7: In order to stabilize the image quality, machine may stop its operation temporarily. *8: When the optional inner catch tray is installed, the capacity of the center tray is 250 sheets (A4LEF), and that of the inner catch tray is 250 sheets (A4LEF). *9: Excluding toner.

Fax Function (Optional)

Item		Description
Sent Document Size	Max.: A3, 11 x 17", Long size document (Max. 600mm)	
Recording Paper Size	Max.: A3, 11 x 17", Min.: A5	
Transmission Time	Less than 2 seconds*1	
Transmission Mode	G3	
Transmission Resolution	Standard	8 x 3.85 lines/mm, 200 x 100dpi (7.9 x 3.9 dots/mm)
	Fine	8 x 7.7 lines/mm, 200 x 200dpi (7.9 x 7.9 dots/mm)
	Super Fine (400dpi)	16 x 15.4 lines/mm, 400 x 400dpi (15.7 x 15.7 dots/mm)
	Super Fine (600dpi)	600 x 600dpi (23.6 x 23.6 dots/mm)
Coding Method	MH, MR, MMR, JBIG	
Transmission Speed	G3: 33.6/31.2/28.8/26.4/24.0/21.6/19.2/16.8/14.4/12.0/9.6/7.2/4.8/2.4kbps	
Applicable Lines	Telephone subscriber line, PBX, facsimile communication network (PSTN), Max. 3 ports*2	

*1: When A4 size document with approximately 700 characters is transmitted in standard image quality (8 x 3.85 lines/mm) and in high speed mode (28.8kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition. *2: Up to three lines can be connected. Number of ports is that of the channels that can be used for communication.

Internet Fax Function (Optional)

Item		Description
Sent Document Size	A3, B4, A4	
Transmission Resolution	Same as those in Fax Function	
Output Format	Format: TIFF-FX, Compression method: MH, MMR, JBIG	
Profile	TIFF-S, TIFF-F, TIFF-J	
Protocol	To send: SMTP, To receive: SMTP, POP3	
Interface	Ethernet 100BASE-TX/10BASE-T	

Duplex Automatic Document Feeder (Optional)

Item		Description
Type	Duplex Automatic Document Feeder	
Original Paper Size/Paper Weight	Max.: A3, 11 x 17", Min.: A5, 38-128g/m ² (Duplex: 50-128g/m ²)	
Feeding Capacity*1	110 sheets	
Feeding Speed*2	Monochrome: 20cpm Color: 20cpm	
Dimensions/Weight	(W)540 x (D)492 x (H)125mm, 8kg	

*1: Fuji Xerox "P" paper. *2: A4LEF/Simplex

<Reproduction Prohibitions> Please note that reproduction of the following is prohibited by law:

●Domestic and overseas bank notes and coins, government-issued securities, national bonds and local bond certificates. ●Unused postage stamps and post cards. ●Certificate stamps stipulated by law. ●The reproduction of copyrighted works (literary works, musical works, paintings, engravings, maps, cinematographic works, photographic works, etc.) is prohibited except when they are reproduced personally, at home or within limited range. ●This product has an anti-counterfeit feature. This feature does not assure complete prevention of illegal reproduction. Please be careful about the management of equipment used.

Print Function

Item		Description
Type	Built-in Type	
Continuous Print Speed*1	Same as those shown in Basic Function/Copy Function	
Resolution	Output	600 x 600dpi
	Data Processing	Standard: 300 x 300dpi, High quality: 600 x 600dpi
PDL	Standard	ART EX
	Optional	Adobe® PostScript® 3™
Protocol	TCP/IP (Ipd, IPP, Port9100, SMB, WSD*2, Novell® NetWare®, BMLinkS®, ThinPrint) Novell® NetWare® (IPX/SPX), NetBEUI (SMB), EtherTalk*3	
OS*4	Standard	[ART EX Driver] Windows® 2000 Japanese/English, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® 7 Japanese/English, Windows® XP Professional x64 Edition Japanese/English, Windows Server® 2003 x64 Editions Japanese/English, Windows Vista® 64-bit Japanese/English, Windows Server® 2008 (x64) Japanese/English, Windows Server® 2008 R2 Japanese/English, Windows® 7 64-bit Japanese/English Mac OS X Driver]Mac OS X 10.5/10.6 Japanese/English
	Optional	[Adobe® PostScript® 3™ Kit] Windows® 2000 Japanese/English*, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® 7 Japanese/English, Windows® XP Professional x64 Edition Japanese/English, Windows Server® 2003 x64 Editions Japanese/English, Windows Vista® 64-bit Japanese/English, Windows Server® 2008 (x64) Japanese/English, Windows Server® 2008 R2 Japanese/English, Windows® 7 64-bit Japanese/English Mac OS 9.2.2 Japanese/English, Mac OS X 10.3.9~10.4.6/10.4.8~10.4.11/10.5/10.6 Japanese/English
Fonts	Standard	Outline (Heisei-Minchou™ W3, Heisei-Kaku-Gothic™ W5, European 19 Fonts), Stroke (Japanese Fonts, European Fonts: for HP-GL)
	Optional	[Adobe® PostScript® 3™ Kit] Heisei 2 Fonts: Japanese 2 Fonts (Heisei-Minchou™ W3, Heisei-Kaku-Gothic™ W5), European 136 Fonts Morisawa 2 Fonts: Japanese 2 Fonts (Ryumin L-KL™, Middle Gothic BBB™), European 136 Fonts [Emulation Kit] European 82 Fonts, Symbol 37 Sets
Emulation	Standard	ART IV, ESC/P (VP-1000), BMLinks®, PDF, XPS, Docuworks, TIFF, JPEG
	Optional	[Emulation Kit] PC-PR201H, HP-GL (HP7586B), HP-GL2/RTL (HP Design Jet750C Plus), PCL5/PCL6
Interface	Ethernet 100BASE-TX/10BASE-T, USB2.0*6	

*1: Printing speed may be lower depending on documents when printed in high resolution. *2: WSD: Web Services on Devices. *3: The optional Adobe® PostScript® 3™ kit is required. Supports Mac OS 8.6/9.2.2 Japanese, Mac OS X 10.3.9/10.4.10 Japanese. *4: Please refer to the Fuji Xerox web site about the latest compliant OS information. *5: Windows® 2000 Japanese/English Service Pack 3 or later version must be applied. *6: Supports Windows® 2000, Windows® XP, Windows Server® 2003, Windows Vista®, Windows Server® 2008 (x86), Windows® XP Professional x64 Edition, Windows Server® 2003 x64 Editions, Windows Vista® 64-bit, Windows Server® 2008 (x64), Mac OS X 10.3.9/10.4.11/10.5 Japanese.

Scan Function (Optional)

Item		Description
Type	Color Scanner	
Original Paper Size	Same as those shown in Basic Function/Copy Function	
Scanning Resolution	600 x 600dpi, 400 x 400dpi, 300 x 300dpi, 200 x 200dpi	
Scanning Half-tone	10-bit input and 8-bit output for each RGB	
Scanning Speed*1	Monochrome: 55ipm, Color: 55ipm Fuji Xerox standard document (A4LEF), 200dpi, Stored to mailbox	
Interface	Ethernet 100BASE-TX/10BASE-T	
Scan to Mailbox	Protocol	TCP/IP (WebDAV, HTTP)
	Output Format	Monochrome Binary: TIFF, DocuWorks*2, PDF*2, XPS*2 Grayscale: TIFF, JPEG*3, DocuWorks*2, PDF*2, XPS*2 Full Color: TIFF, JPEG, DocuWorks*2, PDF*2, XPS*2
	Driver	TWAIN
	OS*4	Windows® 2000 Japanese/English, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® 7 Japanese/English, Windows® XP Professional x64 Edition Japanese/English, Windows Server® 2003 x64 Editions Japanese/English, Windows Vista® 64-bit Japanese/English, Windows Server® 2008 (x64) Japanese/English, Windows Server® 2008 R2 Japanese/English, Windows® 7 64-bit Japanese/English
Save to PC	Protocol	TCP/IP (SMB, FTP)
	OS*4	Windows® 2000 Japanese/English, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® 7 Japanese/English Windows® XP Professional x64 Edition Japanese, Windows Server® 2003 x64 Editions Japanese, Windows Vista® 64-bit Japanese, Windows Server® 2008 (x64) Japanese/English, Windows Server® 2008 R2 Japanese/English, Windows® 7 64-bit Japanese/English Mac OS X 10.2.x/10.3.8/10.3.9/10.4.2/10.4.4/10.4.8/10.4.9/10.4.10/10.5/10.6 Japanese/English, NetWare 5.11/5.12) Japanese*5
	Output Format	Monochrome Binary: TIFF, DocuWorks, PDF, XPS Grayscale/Full Color: TIFF, JPEG, DocuWorks, PDF, XPS
	Protocol	TCP/IP (SMTP)
e-Mail*6	Output Format	Monochrome Binary: TIFF, DocuWorks, PDF, XPS Grayscale/Full Color: TIFF, JPEG, DocuWorks, PDF, XPS

*1: Scanning speed varies according to the document type. *2: When scanned image is retrieved using CentreWare Internet Services. *3: When Network Scanner Utility 3 is used. *4: Please refer to the Fuji Xerox web site about the latest compliant OS information. *5: Supports only FTP. *6: When optional E-mail Kit is installed.

* If the storage media (hard disk) of the product fails, the data received, stored, or registered in the media may be erased. Fuji Xerox will not be held responsible for any damage caused due to such loss of data.

* Key repair components will be available for at least 7 years after the product is no longer manufactured.



<For Your Safe Use>

●Before using the product, read the Instruction Manual carefully for proper use. ●Use the product with an appropriate and adequate power source and voltage displayed. ●Be sure to ground the machine. In the case of a failure or short circuit, an electric shock may result.



For comments about Fuji Xerox and consultation, contact **the Customer Information Center.**

0120-27-4100

Toll-free call service time: 9:00 to 12:00 and 13:00 to 17:00 excluding Saturdays, Sundays and national holidays (at Headquarters in Tokyo). However, you cannot use this service with an extension telephone with call area restrictions. Please use a nation-wide call available telephone.

The telephone call might be recorded to correctly understand your inquiry or to later check how the receiver provided support.

DocuCentre-IV

C2260



DocuCentre-IV C2260

Digital Color Multifunction Device



DocuCentre-IV C2260 Digital Color Multifunction Device

Compact, low-cost, and convenient

Tried-and-true performance with a new design and new functions to improve user friendliness



※ The above shows the DocuCentre-IV C2260 PFS model.

Convenient

The new design, which has many convenient features, is easy and intuitive to use. A new color touch panel, in particular, is easier to use.

New 7-inch color TFT touch panel

The user interface has been made more graphical by changing many text items into colorful icons. The buttons are bigger and the text is easier to read, improving both operability and visibility. Easy-to-see LED indicators also let you check when paper has run out or jammed from a distance.




Simplified screens

In addition to standard copy and fax* screens, the DocuCentre-IV C2260 also offers simple copy screen and simple fax screen*. These screens show only the basic settings, so jobs can be specified quickly and easily. With a 5 mm font size, text is also easy to see.

* The fax function is optional in the P model. A Fax Kit is required.



Simple copy screen



Simple fax screen

Scanning directly to USB memory

The control panel includes a USB memory port. Any commercial USB memory stick can be inserted and scanned documents can be saved directly to the inserted device. Documents can also be scanned directly to a computer or sent by e-mail.

※ Optional. A Scanner Kit, Scan to USB Kit, and USB Cable Kit are required.



low-Cost

The DocuCentre-IV C2260 is friendly to both people and the environment. It saves energy and reduces CO₂ emissions, and runs very quietly. It also offers a range of advanced features to improve work efficiency while streamlining costs.

Copy		Print		Fax	Scan	
Color	Monochrome	Color	Monochrome	Super	Color	Monochrome
20	20	20	20	G3	55	55
cpm*1	cpm*1	ppm*1	ppm*1	Compatible	ipm*2	ipm*2

*1 A4LEF *2 Fuji Xerox Standard Document, A4LEF, scan to mailbox

	Copy	Print	Fax	Scan	DADF
P model	●	●	○	○	○
PFS model	●	●	●	●	●

●:Standard ○:Optional


Energy-saving design

The DocuCentre-IV C2260 consumes no more than 3 W of power in sleep mode, and wakes up in a mere 18 seconds*¹. Energy is also saved by using EA-Eco toner, which can be fused to paper at a low temperature. The DocuCentre-IV C2260 features a TEC*² rating of 1.63 kWh*³, making it ENERGY STAR compliant.

*1 Warm-up time may take longer due to image quality adjustment.


*2 Estimated value of the standard power consumption during one week.

*3 PFS model. 1.56 kWh in the case of the P model.

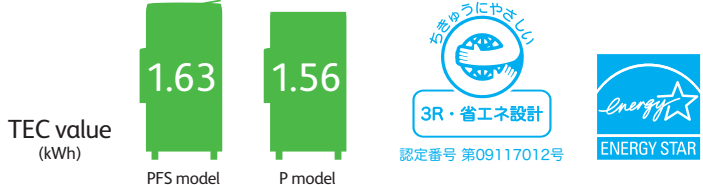

2-Up and duplex printing features save paper and toner

The DocuCentre-IV C2260 includes a 2-Up feature enabling images on two sheets to be reduced and printed on one sheet. By combining this feature with duplex copying, four sheets can be printed on a single sheet, leading to considerable reduction in paper and toner use.

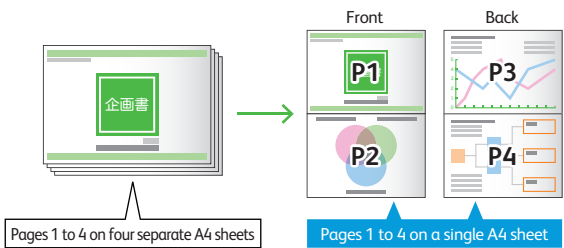

Wide range of fax features to lower costs

Incoming faxes

Incoming faxes can be viewed as thumbnail images on the control panel for user to select and print only the necessary documents.

Block unwanted fax

You can choose not to accept certain faxes to weed out faxes from unwanted sources such as direct mail marketing companies.

Outgoing faxes

Faxes can be sent directly from your computer.

Internet Fax*

Faxes can be sent and received as e-mail attachments, eliminating communication expenses.

* Internet Fax Kit is required.

※ See page 8 for more details of the fax function.


※ The fax feature is optional in the P model. A Fax Kit is required.

Environmentally conscious design

Low-noise design achieved through natural convection cooling

The DocuCentre-IV C2260 utilizes a layout that separates the power supply part from the print engine, as well as an air-flow design that uses natural convection cooling—where heated air rises and is replaced by cool air—to dramatically increase the efficiency for cooling the inside of the equipment. In addition, all fans—which continue to run when the unit is put on standby in conventional models—are turned off lowering the power consumption and achieving a noise-free* standby status. Emitting only 47dB(A) while in full operation you won't even notice the DocuCentre-IV C2260 working away quietly next to your desk.

* 16dB(A). After completing long printing jobs, the DocuCentre-IV C2260 may emit only 20 dB(A), which is equivalent to the sound of a sleeping person's breathing.

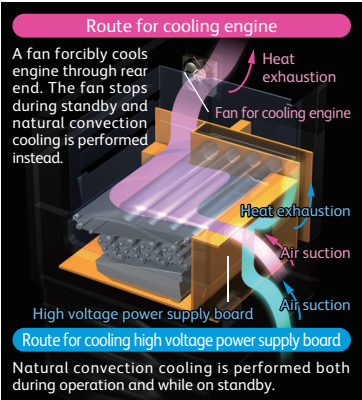


Compact

Extensive functions packed into a compact body. Can be used by anyone, anywhere to raise work efficiency.

Space-saving design

The DocuCentre-IV C2260 features a space-saving design with a profile of just W 585 D 640 H 1,046 mm*. The slim duplex output unit and by-pass tray create a compact multifunction device that can be located anywhere in the office. Front-loading design of paper and consumables allows for easy maintenance.

* P model. The height of the PFS model is 1,132 mm.

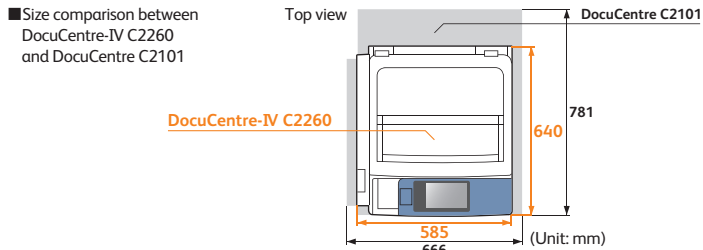

Separate output trays for different jobs

The output areas are wide, making retrieval easy, and their dark blue color helps you see whether there is any paper sitting in the area. An optional Inner Catch Tray can even be attached to sort incoming faxes*.

※ When using the optional Fax Kit.



Main unit trays



By-pass tray